## **AB60J** ARTICULATED BOOM LIFT



- Tough & reliable diesel articulated boom lift
- Powerful 4-wheel drive for rough terrain
- Robust, rental tough design
- Simple to operate and maintain
- Ideal for both maintenance and construction applications



### **ARTICULATED BOOM LIFT**

DIMENSIONS	AB60J
Max. working height	20.1m
Max. platform height	18.1m
Max. working outreach	13.1m
Clearance height at max. outreach	5.94m
Platform size	2.44m x 0.91m
Overall width ( <b>A</b> )	2.4m
Overall length ( <b>B</b> )	8.87m
Stowed height ( <b>C</b> )	2.51m
Ground clearance	300mm

PERFORMANCE	
Platform capacity (SWL)	227kg
Max. drive height	18.1m
Max.wind speed	12.5m/s
Max. drive speed (stowed)	5.1km/h
Max. drive speed (elevated)	0.96km/h
Jib length	1.8m
Jib arc	75°
Platform rotation	180°
Turret rotation (continuous)	360°
Tailswing (riser boom elevated)	0m
Tailswing (riser boom stowed)	1.52m
Raise/lower time	125/121 sec
Gradeability	20%
Inside turning radius	5.24m
Outside turning radius	6.17m
Tires	15 x 19.5 foam filled
Controls	proportional joystick drive, lift & rotation
Drive system	4-wheel drive

#### POWER

Power source

Kubota V2403 48kW/65hp diesel - Tier 4 Final


11,249kg


#### WEIGHT

Weight

© Snorkel 2021

#### WORKING ENVELOPE

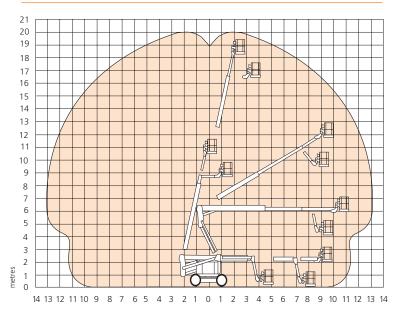



#### **STANDARD FEATURES**

- Snorkel Guard<sup>™</sup> secondary guarding system •
- Hydraulic platform rotation •
- 4-wheel drive
- Drive motion alarm •
- Power line to platform •
- Flashing amber light
- Proportional drive, lift and swing
- Dual lanyard attachment points •
- Foam filled tires ٠
- Horn
- 3.5° tilt alarm & cut out •
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant •

#### OPTIONS

- Special paint colors •
- AC generator 110V/2.5kW •
- Non marking tires •
- Airline to platform •
- Aircraft package
- Deluxe aircraft package •
- Cold weather package
- Extreme cold weather package •
- Extreme environment package
- Light package •
- Tow kit •
- Glazier package •
- Utility package •
- Tool tray
- Environmental hydraulic oil
- Pipe rack •
- Personal fall arrest system
- Snorkel
- OnSite<sup>™</sup> telematics



P.O. Box 1160 St.Joseph, MO 64502-1160, USA Tel: 1 (785) 989-3000 Toll-free: 1 (800) 255-0317 Fax: 1 (785) 989-3070 Email: sales.usa@snorkellifts.com

ANSI Specification Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.

www.snorkellifts.com

# AB60J